

FEATURES

- » Rated voltage of 16V and capacitance of 108F
- » High power module with ultra-low ESR
- » Exceptional shock and vibration resistance
- » Long lifetimes with up to 1 million duty cycles
- » Integrated UMU (Ultracapacitor Management Unit) for effective cell balancing and monitoring
- » Typical applications:
 - Transportation and automotive
 - Wind turbine, Industrial UPS and DVR



* Image is not to scale

SPECIFICATIONS

ELECTRICAL		EMHSR-0108C0-016R0S
Rated Voltage, V_R		16 V_{DC}
Surge Voltage ¹		17.1 V _{DC}
Rated Capacitance ²		108 F
Capacitance Tolerance	Maximum	0% / +20%
	Average ⁴	+5% / +15%
DC-ESR (Equivalent Series Resistance) ³	Maximum	4.3 mΩ
	Average ⁴	2.3 mΩ
Typical Leakage Current ⁵	Under 12V	1.5 mA
	Over 12V	42 ~ 55 mA
Maximum Peak Current, Non-repetitive ⁶		590 A
Maximum Stored Energy, E_{max} ⁷		3.8 Wh
Gravimetric Specific Energy ⁷		1.0 Wh/kg
Usable Specific Power ⁷		1.9 kW/kg
Impedance Match Specific Power ⁷		4.0 kW/kg

TEMPERATURE	
Operating Temperature Range	-40 ~ 65°C (Δ CAP<5% and Δ ESR<150% of initial value measured at 25°C)
Storage Temperature Range	-40 ~ 70°C (storage without charge)

LIFE	
Endurance (at V_R and 65°C) ⁸	1,500 hours
Room Temperature (at V_R and 25°C) ⁸	10 years
Cycle Life (at 25°C) ⁹	1,000,000 cycles
Shelf Life	2 years (stored without charge at under 70°C and 40% RH)


PHYSICAL	
Output Terminals	M8 screw holes
Insulation Coordination	IEC 61287-1 (Category: OV II) Rated insulation voltage: 1kV DC or 2.8kV AC (at 50Hz, 10 sec) Rated impulse withstand voltage: 6kV DC
Protection Degree	IEC 60529 IP 65 (Dust-tight and protected against water jets)
Vibration Specification	SAE J2380
Shock Specification	SAE J2464

SPECIFICATIONS (Cont'd)

UMU / MONITORING	
Cell Balancing	Active single cell balancing
Voltage Monitoring	5V, high and low over-voltage logic signal
Temperature Monitoring	Resistance via NTC thermistor (10kΩ at 25°C)
Connector	Deutsch 4-pin water-proof connector

THERMAL	
Typical Thermal Resistance, R_{th} (Temperature Sensor Output)	2.6 °C/W
Typical Thermal Capacitance, C_{th}	1,200 J/°C
Maximum Continuous Current ($\Delta T = 15^\circ\text{C}$) ¹⁰	35 A
Maximum Continuous Current ($\Delta T = 40^\circ\text{C}$) ¹⁰	60 A

SAFETY	
RoHS	Compliant
REACH	Compliant

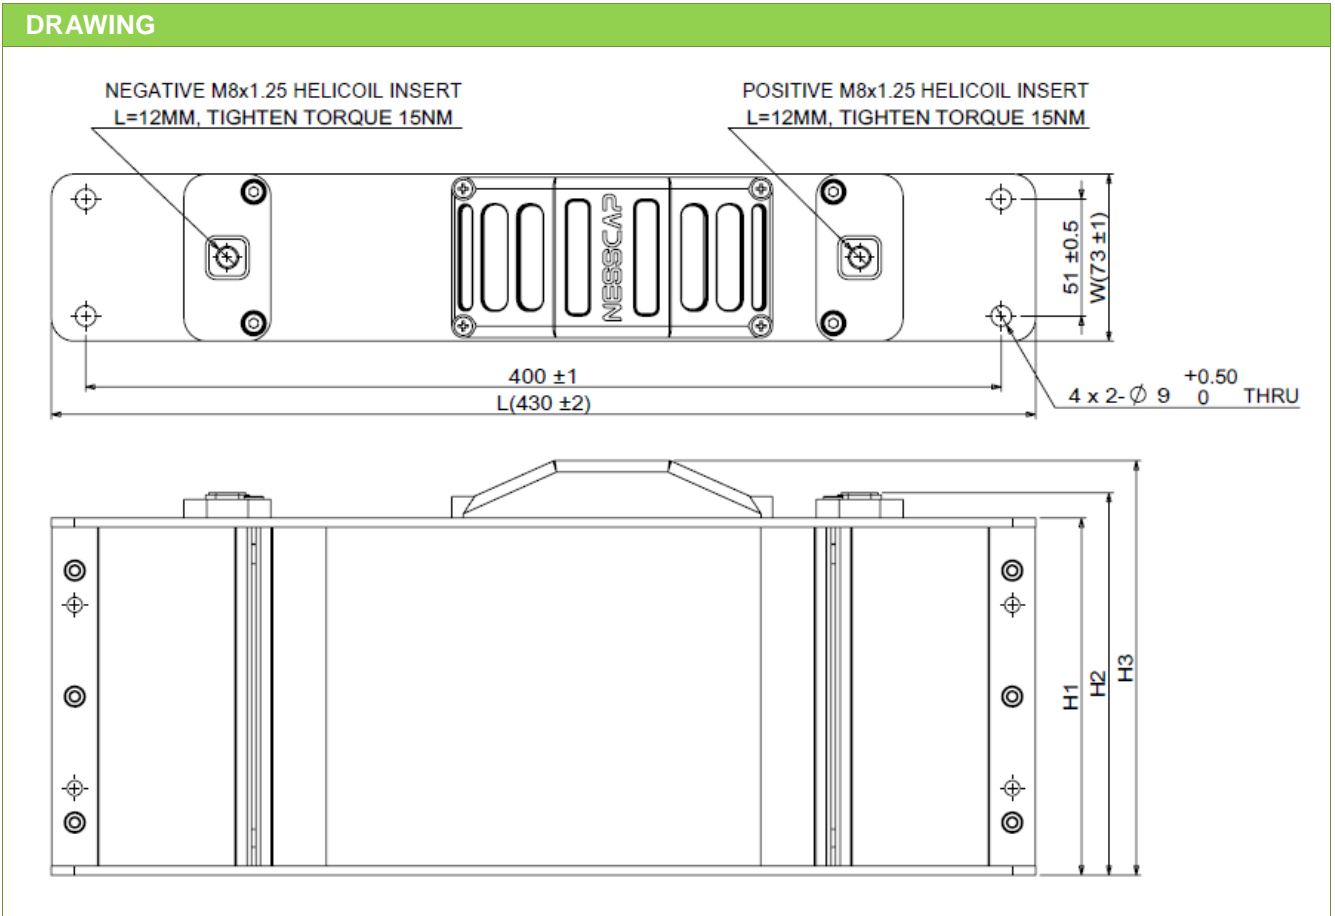


DIMENSION & WEIGHT					
L (±2.0)	W (±1.0)	H1 (Max)	H2 (Max)	H3 (Max)	Nominal Weight
430 mm	73 mm	73.5 mm	83.5 mm	98.5 mm	3.7 kg

NOTE
1. Surge Voltage

- > Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.

2. Rated Capacitance (Measurement Method)

- > Constant current charge with 4CV [mA] to V_R
e.g. In case of 16V-108F module, $4 \times 108 \times 16 = 6,900\text{mA} = 6.9\text{A}$
- > Constant voltage charge at V_R for 5min.
- > Constant current discharge with 4CV [mA] to 2.4V.

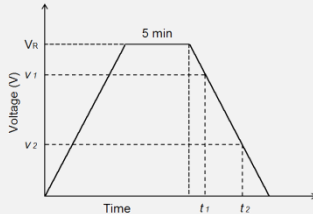


$$C = \frac{I \times (t_2 - t_1)}{v_1 - v_2}$$

where C is the capacitance (F);
 I is the absolute value of the discharge current (A);
 v_1 is the measurement starting voltage, $0.8 \times V_R$ (V);
 v_2 is the measurement end voltage, $0.4 \times V_R$ (V);
 t_1 is the time from discharge start to reach v_1 (s);
 t_2 is the time from discharge start to reach v_2 (s);

3. DC-ESR (Measurement Method)

- > Constant current charge with 4CV [mA] to V_R .
- > Constant voltage charge at V_R for 5min.
- > Constant current discharge with 40CV [mA] to 12V.
e.g. In case of 16V-108F module, $40 \times 108 \times 16 = 69,000\text{mA} = 69\text{A}$

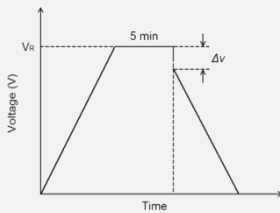

$$ESR_{DC} = \frac{\Delta v}{I}$$

where ESR_{DC} is the DC-ESR (Ω);
 Δv is the voltage drop during first 10ms of discharge (V);
 I is the absolute value of the discharge current (A)

4. Average

- > Typical value or percentage spread that may be present in one Shipment

5. Typical Leakage Current (LC)

- > LC under 12V (2V per cell) is equal to the LC of the cell measured at the cell's rated voltage and at room temperature after 72 hours.
- > LC over 12V (2V per cell) is the sum of the LC of the cell and the bypass current created by the active balancing circuit.

6. Maximum Peak Current

- > Current for 1-second discharging from the rated voltage to the half rated voltage under the constant current discharging mode

$$I = \frac{\frac{1}{2}V_R}{\Delta t / C + ESR_{DC}}$$

where I is the maximum peak current (A);
 V_R is the rated voltage (V);
 Δt is the discharge time (sec); $\Delta t = 1$ sec in this case;
 C is the rated capacitance (F);
 ESR_{DC} is the maximum DC-ESR (Ω);

- > The stated maximum peak current should **not** be used in normal operation and is only provided as a reference value.

7. Energy & Power

- > Maximum Stored Energy, E_{max} (Wh) = $\frac{1}{2}CV_R^2 / 3600$

- > Gravimetric Specific Energy (Wh/kg) = $\frac{E_{Max}}{Weight}$

- > Usable Specific Power (W/kg) = $\frac{0.12V_R^2}{ESR_{DC} \times Weight}$

- > Impedance Match Specific Power (W/kg) = $\frac{0.25V_R^2}{ESR_{DC} \times Weight}$

8. Endurance and Room Temperature DC Life

- > Test Conditions:
 - Temperature: $65 \pm 2^\circ\text{C}$, $25 \pm 2^\circ\text{C}$
 - Applied Voltage: $V_R \pm 0.02V$
- > End-of-Life Conditions:
 - Capacitance: -20% from the rated minimum value
 - DC-ESR: +100% from the rated maximum value
- > Capacitance and ESR measurements are taken at 25°C

9. Cycle Life

- > Test Conditions (1-minute cycle at room temperature):
 - Constant current charge from $1/2V_R$ to V_R .
 - Constant current discharge from V_R to $1/2V_R$.
 - Repeat the cycle for the desired number of times.

10. Maximum Continuous Current

- > Current which can be used within the allowed temperature range under the constant current discharging mode

$$I = \sqrt{\frac{\Delta T}{R_{th} \times ESR_{DC}}}$$

where I is the maximum continuous current (A);
 ΔT is the change in temperature ($^\circ\text{C}$);
 R_{th} is the thermal resistance ($^\circ\text{C}/\text{W}$);
 ESR_{DC} is the DC-ESR (Ω)

The contents of this document are subject to change without notice. The values presented are thought to be accurate at the time of writing. Nesscap does not guarantee that the values are always error-free, nor does Nesscap make any other representation or warranty regarding the accuracy or credibility of the information contained in this document. For more information, please reach us at one of the following contacts.

 Nesscap Energy Inc. Suite 3800, Royal Bank Plaza, South Tower, 200 Bay Street, P.O. Box 84, Toronto, Ontario, M5J 2Z4 CANADA	 Nesscap Energy Inc. S24040 Camino Del Avion #A118, Monarch Beach, California, 92629 USA	 Nesscap Co., Ltd. 17, Dongtangiheung-ro 681beon- gil, Giheung-gu, Yongin-si, Gyeonggi-do REPUBLIC OF KOREA	 Nesscap China Room 1608, Block N, Cangson Building, Chegongmiao, Futian District, Shenzhen City, P.R.C CHINA	 Nesscap Energy EASTERN EUROPE 10A, prospect 60-letiya Oktyabrya Moscow, 117036 RUSSIA	 Nesscap Energy GmbH Beerengarten 4 D-86938 Schondorf GERMANY
marketing@nesscap.com			info@nesscap-energy.de		